


LIGHTBLASTER L720

CENTOLIGHT STROBE AND WASH LED BAR LIGHTBLASTER L720

The **LIGHTBLASTER L720** stands as a sophisticated LED strobe and wash light meticulously crafted for indoor applications, where power, safety, and versatility converge seamlessly. Elevating the illumination experience, this lighting marvel is purposefully designed to meet the exacting demands of contemporary settings.

At the heart of the **LIGHTBLASTER L720** lies a cutting-edge light source comprising 480pcs RGB LED 3in1 and 240pcs White LED elements. Remarkably, the emission surface is artfully divided into 40+20 independent zones, showcasing a commitment to precision and control. The discerning user can exercise unparalleled authority by manipulating individual colors in each zone through DMX, or opt for simplified channel configurations for fundamental strobe and wash applications. What sets the **LIGHTBLASTER L720** apart is its unparalleled versatility. Offering a spectrum of possibilities, users can effortlessly tailor the lighting experience to their specific needs. Whether it's the nuanced control of colors through DMX or the streamlined simplicity of basic strobe and wash applications, this lighting fixture adapts with finesse.

In conclusion, the **LIGHTBLASTER L720** is a testament to innovation and excellence in the realm of LED lighting. Its meticulous design, technical prowess, and adaptability make it a formidable choice for those seeking to elevate their indoor lighting experience. Immerse yourself in a world where brilliance meets subtlety, courtesy of the **LIGHTBLASTER L720**.

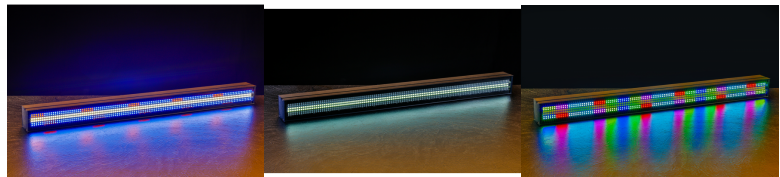

PRODUCT DETAILS

Key features

480pcs RGB 3in1 and 240pcs White LED

40+20 Independent Zones

Strobe from 0 to 30Hz

Built-in Strobe, Color Mixing and Auto effects

DMX512/Auto/Master-Slave/Sound Control Modes

Convection Cooling System

Specifications

Led source	480pcs RGB 3in1 and 240pcs White LED
Zones	40+20
Dimmer	0÷100% Control
Strobe	0-30Hz
DMX Channel Modes	4CH / 11CH / 140CH
Control Modes	DMX512/Auto/Master-Slave/Sound Active
Control Panel	4-digit LED Display and 4 Buttons
DMX Connections	3-pin In/Out
Power Connections	PowerCon In/Out
Cooling	Convection Cooling
IP Grade	IP20
Voltage	AC110V-240V
Frequency	50/60Hz
Power Consumption	200W
Fixture Size	(WxDxH) 1000 x 70 x 80 mm (39.37 x 2.75 x 3.15 in)
Fixture Weight	2.5 kg (5.51 lbs.)
Carton Size (WxDxH)	1040 x 130 x 150 mm (40.94 x 5.11 x 5.90 in)
Carton Weight	5 kg (11.02 lbs.)